


Geberit Silent-PP eksantrik redüksiyon



Örnek şekil

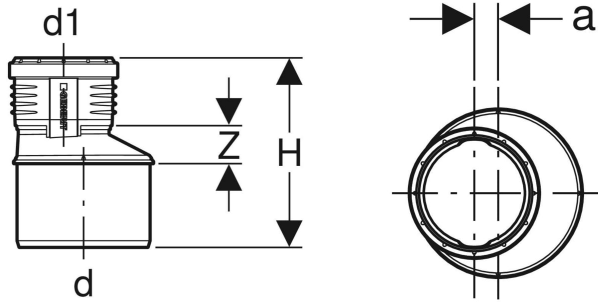

KULLANIM AMAÇLARI

- Binaların içindeki atık suyu boşaltmak için

ÖZELLİKLER

- Eksantrik
- Ses izolasyonlu
- EPDM conta

TEKNİK VERİLER

Montaj sıcaklığı	-10 – +40 °C
Malzeme	PP-MD
Isıl genleşme	0.08 mm/(m·K)

Ürün numarası	DN	d, ø mm	d1, ø mm	a cm	H cm	Z cm
390.271.14.1	50 / 40	50	40	0.5	11.4	1.6
390.279.14.1	50 / 30	50	32	0.9	11.3	1.9
390.372.14.1	70 / 50	75	50	1.2	13.3	2.6
390.471.14.1	90 / 40	90	40	2.4	14.6	3.8
390.472.14.1	90 / 50	90	50	1.9	14.6	3.4
390.473.14.1	90 / 70	90	75	0.7	13.9	2.2

Ürün numarası	DN	d, ø mm	d1, ø mm	a cm	H cm	Z cm
390.571.14.1	100 / 40	110	40	3.3	16.4	4.9
390.572.14.1	100 / 50	110	50	2.8	16.4	4.5
390.573.14.1	100 / 70	110	75	1.7	15.7	3.3
390.574.14.1	100 / 90	110	90	1	15.7	2.7
390.675.14.1	125 / 100	125	110	0.7	17.1	2.9
390.775.14.1	150 / 100	160	110	2.3	19.4	4.5
390.776.14.1	150 / 125	160	125	1.7	19.4	4