


MAINTENANCE MANUAL

INSTANDHALTUNGSANLEITUNG
MANUEL D'ENTRETIEN
ISTRUZIONI PER LA MANUTENZIONE

**KNOW
HOW**
INSTALLED





Water quality

ATTENTION

Damage to device from aggressive disinfectants

Do NOT insert any tablets, fluids, gels or additives containing chlorine, as this substance will corrode/damage cistern parts and VOID WARRANTY. Only potable water with ≤ 4 ppm chlorine concentration in water allowed, including whole house (centralized) water treatments.

Water temperature

ATTENTION

Damage to device from unacceptable water temperature

The water temperature in the cistern must always remain between 0.5°C [33°F] and 25.0°C [77°F] to avoid freezing and condensation that can cause damage to the product and/or property damage.


Maintenance recommendations

Geberit recommends conducting biennial inspections of cistern internal components including supply stop (angle valve), supply hose, filling (float) valve and flushing valve.


- ENSURE moving parts are free to move without binding or misalignment.
- TIGHTEN any water connections that feel loose.
- REPLACE supply hose if it shows any signs of wear or discoloration of the external braiding.
- CLEAN or REPLACE flush valve seal if it shows any signs wear, discoloration, or other damage.




1

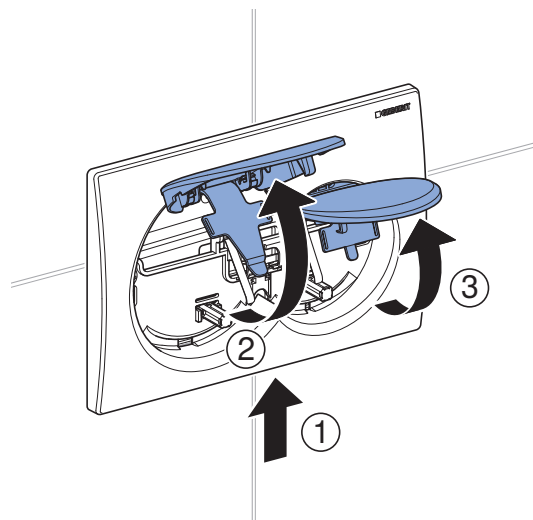


2

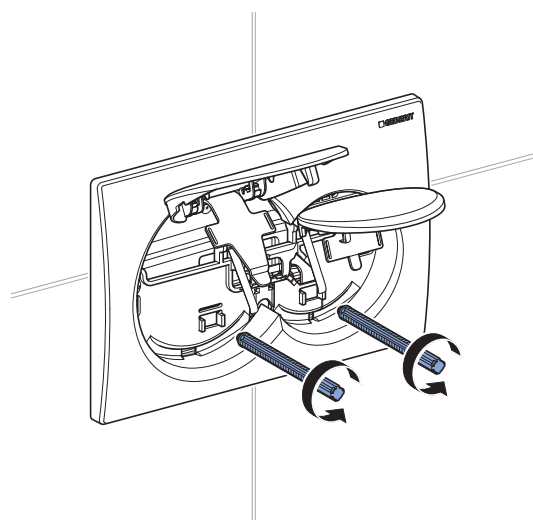


3

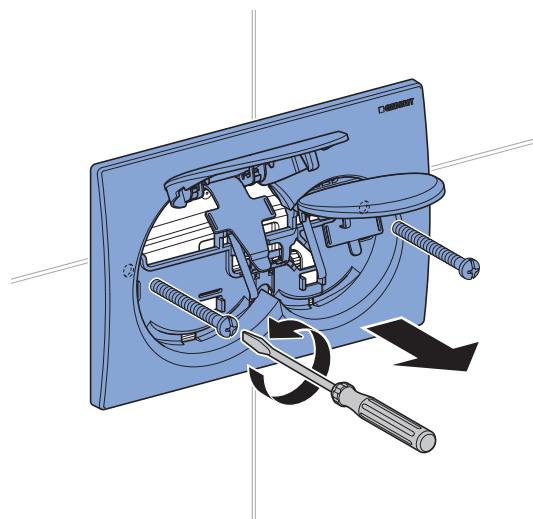

4


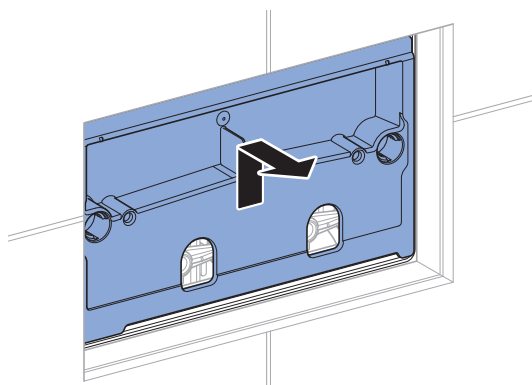


5

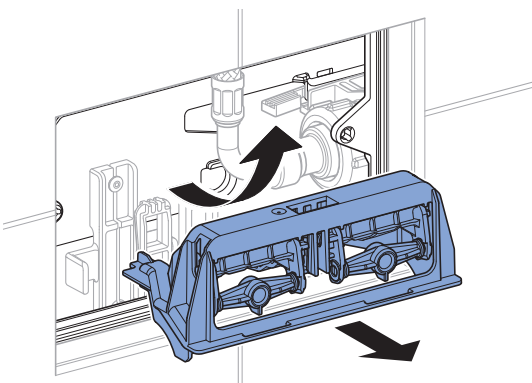


2


1

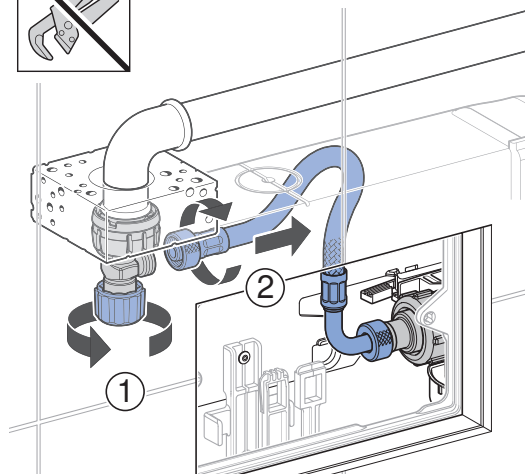


2

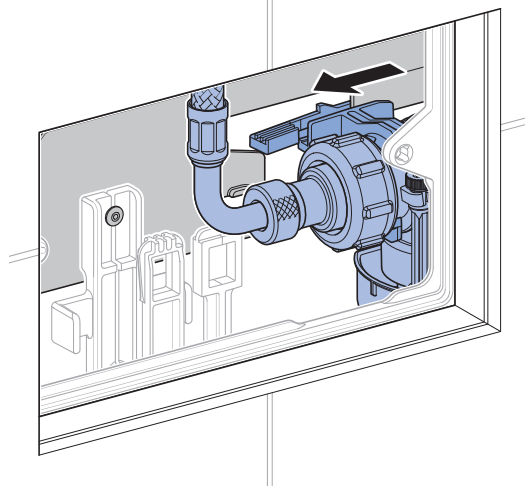


3

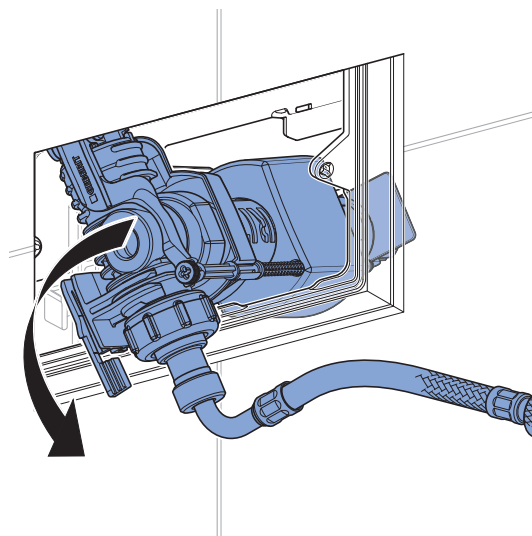


4

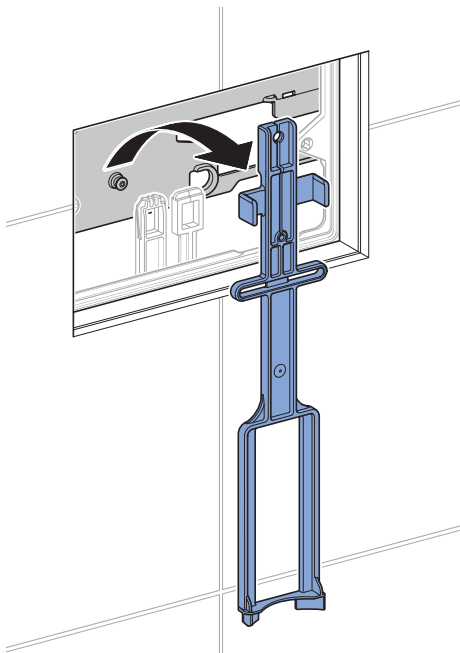



5

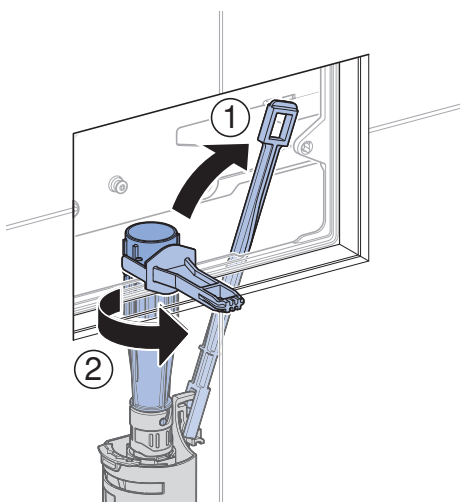


6

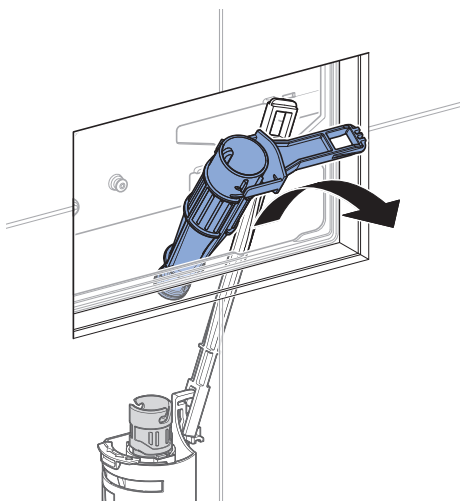


7

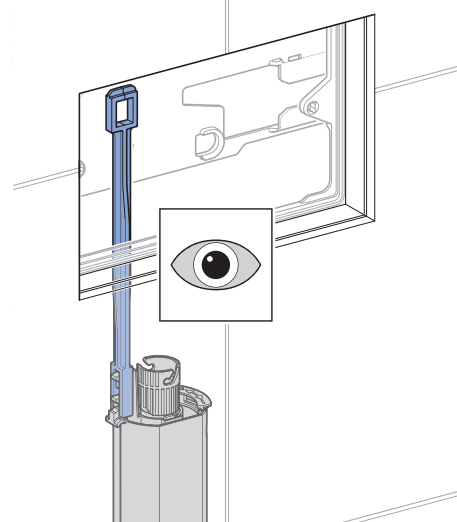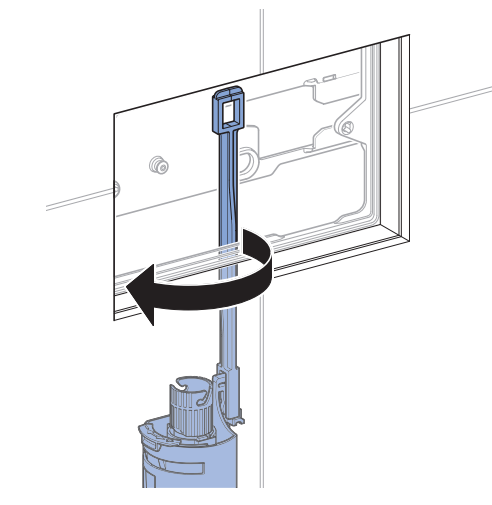


8

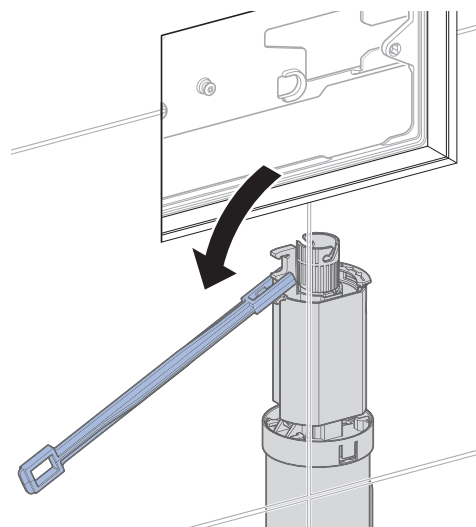


9

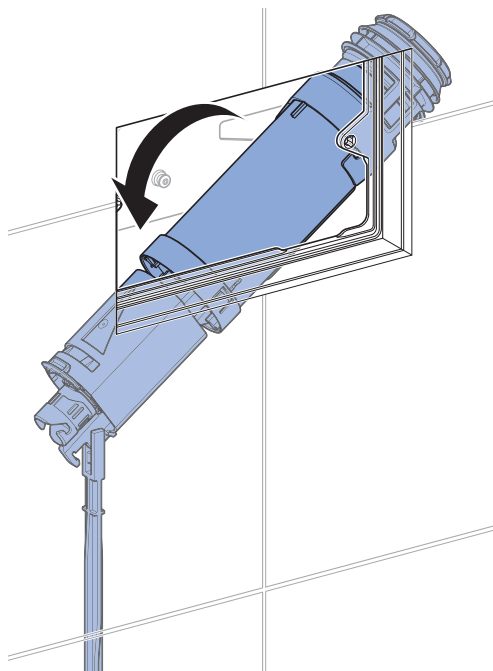


12

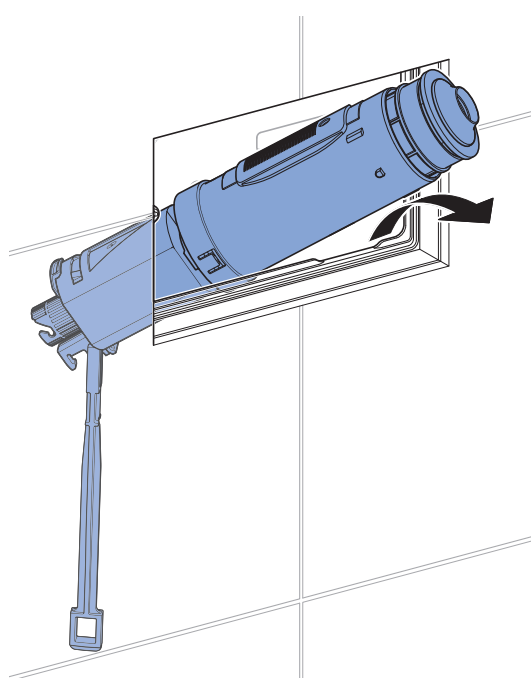


10

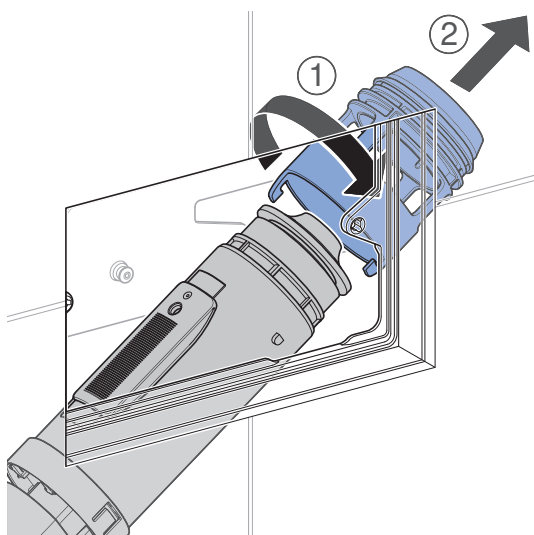

i

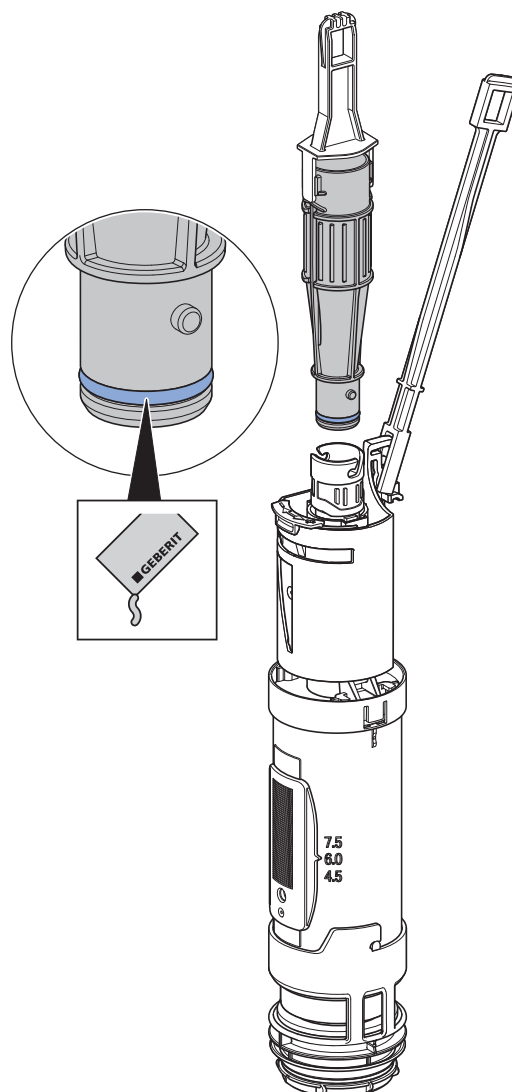

11

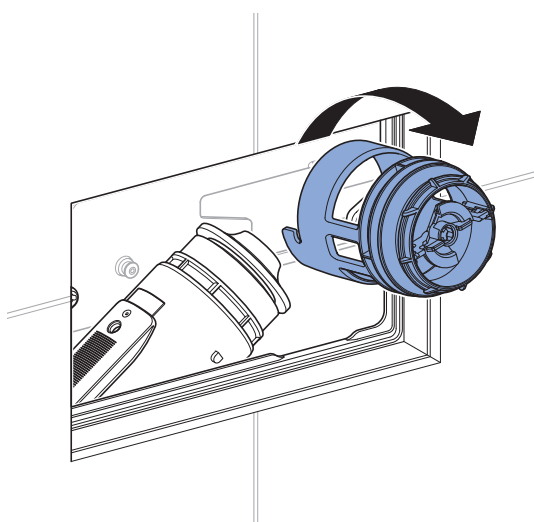



Geberit International AG
Schachenstrasse 77, CH-8645 Jona
documentation@geberit.com
www.geberit.com