

TECHNICAL INFORMATION

Using Geberit washbasin taps with CLAGE E-mini instant water heaters

1 About this document

This Technical Information is about the use of Geberit washbasin taps with CLAGE E-mini instant water heaters.



The document shows which Geberit washbasin taps with electronic flush actuation can be combined with which electronic mini instant water heaters from CLAGE. This information is a joint recommendation from Geberit and CLAGE. The document also contains additional information such as planning rules, connection examples and accessories.

Contents

2	"Suitable CLAGE E-mini instant water heaters", page 2
3	"Suitable Geberit deck-mounted taps with/without exposed function box", page 3
4	"Suitable Geberit deck-mounted taps with concealed function box", page 5
5	"Suitable Geberit wall-mounted taps with concealed function box", page 7

Contact:

Valid from: 01.04.2026
Valid until: –

TECHNICAL INFORMATION

Using Geberit washbasin taps with CLAGE E-mini instant water heaters

2 Suitable CLAGE E-mini instant water heaters

The Geberit washbasin taps referred to below can be combined with the following CLAGE E-mini instant water heaters:

E-mini instant water heater		Tap aerator	Temperature setting
	MCX3, 3.5 kW, 230 V, with mains plug Art. no. 1500-15003	CSP3 (included in scope of delivery)	35 or 38 °C
	MCX7, 6.5 kW, 400 V, fixed connection Art. no. 1500-15007	CSP6 (included in scope of delivery)	35 or 38 °C






Contact:

Valid from: 01.04.2026
Valid until: –

TECHNICAL INFORMATION

Using Geberit washbasin taps with CLAGE E-mini instant water heaters

3 Suitable Geberit deck-mounted taps with/without exposed function box

Washbasin tap	Tap aerator	Run-on time
 Geberit Piave washbasin tap, deck-mounted, mains operation, with exposed function box, without mixer Art. no. 116.161.xx.1¹	Geberit tap aerator (accessory): • With MCX3 E-mini instant water heater: 1.9 l/min, art. no. 243.637.00.1 • With MCX7 E-mini instant water heater: 3.8 l/min, art. no. 243.636.00.1	3seconds
 Geberit Brenta washbasin tap, deck-mounted, mains operation, with exposed function box, without mixer Art. no. 116.171.xx.1¹		
 Geberit Type 185 washbasin tap, mains operation, without mixer Art. no. 116.135.21.1	CLAGE tap aerator (included in scope of delivery with E-mini instant water heater): • With MCX3 E-mini instant water heater: CSP3 • With MCX7 E-mini instant water heater: CSP6	3seconds
 Geberit Type 186 washbasin tap, mains operation, without mixer Art. no. 116.136.21.1		
 Geberit Bambini washbasin tap, mains operation Art. no. 577660000 Art. no. 116.209.21.1 Art. no. 116.209.xx.5¹	Geberit tap aerator (accessory): • With MCX3 E-mini instant water heater: 1.9 l/min, art. no. 243.637.00.1 • With MCX7 E-mini instant water heater: 3.8 l/min, art. no. 243.636.00.1	—

1) xx = various colours and surfaces available

Contact:

Valid from: 01.04.2026
Valid until: —

TECHNICAL INFORMATION

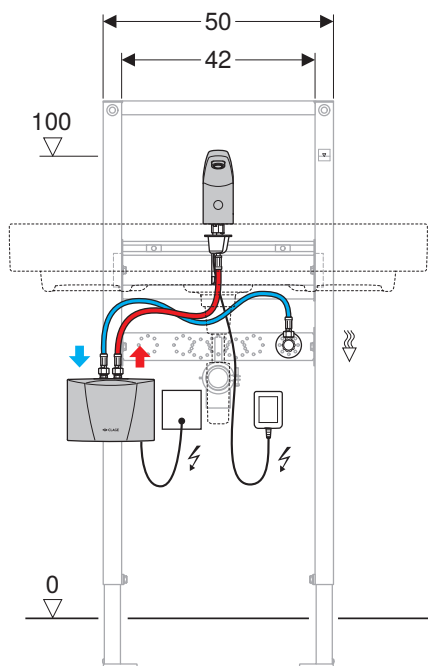
Using Geberit washbasin taps with CLAGE E-mini instant water heaters

Planning rules:


- Only use the version without a mixer for Geberit Types 185 and 186, as well as Piave and Brenta washbasin taps.
- For Geberit Bambini washbasin taps, connect both connection hoses to the faucet using a T-piece (the T-piece is included in the delivery scope of CLAGE E-mini instant water heater).
- Only use the water-saving tap aerators specified in the table.
- Use washbasin taps with mains operation. Washbasin taps with battery operation can also be used, but a mains connection is usually present because of the E-mini instant water heater.
- Set run-on time on 3 seconds:
 - With the Geberit Service Handy:
Geberit Types 185 and 186 washbasin taps: Menu item 30 = [A] and menu item 43 = [3]
Geberit Piave and Brenta washbasin taps: menu item 43 = [3]
Geberit Bambini washbasin taps: Menu item 30 = [A] and menu item 43 = [3]
 - With Geberit Control app under [settings] / [operation mode] / [normal operation]

3.1 Connection examples


For Geberit Types 185 and 186 washbasin taps



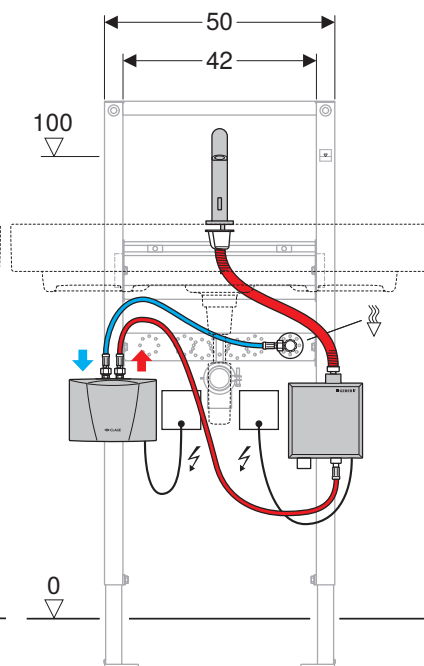For Geberit Piave and Brenta washbasin taps with exposed function box



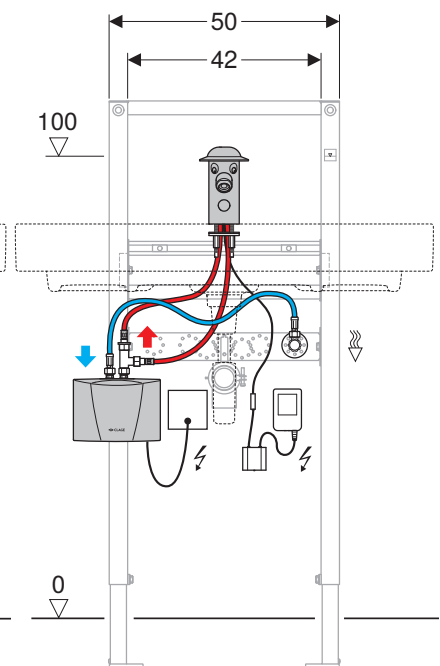For Geberit Bambini washbasin tap, mains operation





Contact:

Valid from: 01.04.2026
Valid until: –

TECHNICAL INFORMATION

Using Geberit washbasin taps with CLAGE E-mini instant water heaters

4 Suitable Geberit deck-mounted taps with concealed function box

Washbasin tap	Tap aerator	Run-on time
 Geberit Piave washbasin tap, deck-mounted, mains operation, without mixer Art. no. 116.181.xx.1 ¹⁾	Geberit tap aerator (accessory): • With MCX3 E-mini instant water heater: 1.9 l/min, art. no. 243.637.00.1 • With MCX7 E-mini instant water heater: 3.8 l/min, art. no. 243.636.00.1	3seconds
 Geberit Brenta washbasin tap, deck-mounted, mains operation, without mixer Art. no. 116.191.xx.1 ¹⁾		

1) xx = various colours and surfaces available

Planning rules:

- Only use washbasin taps without mixers.
- Only use the water-saving tap aerators specified in the table.
- Use washbasin taps with mains operation. Washbasin taps with battery operation can also be used, but a mains connection is usually present because of the E-mini instant water heater.
- Set run-on time on 3 seconds:
 - With the Geberit Service Handy: menu item 43 = [3]
 - With Geberit Control app under [settings] / [operation mode] / [normal operation]

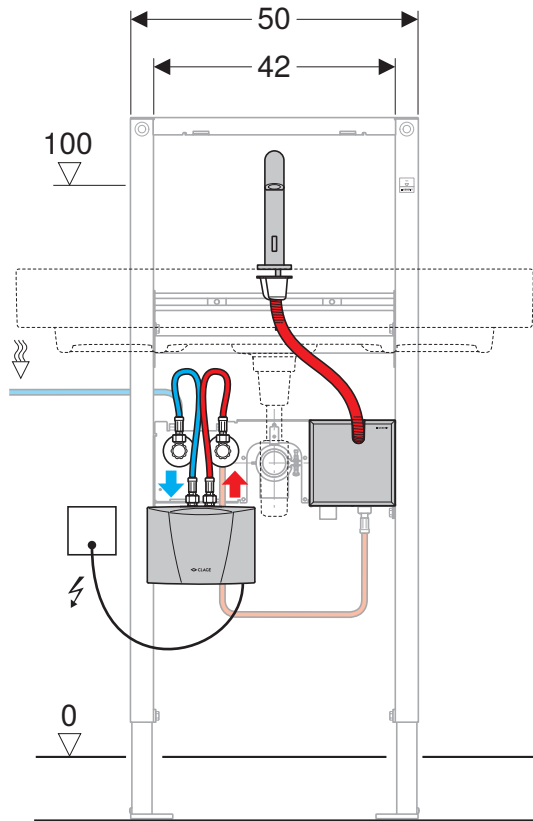
Contact:

Valid from: 01.04.2026
Valid until: –

TECHNICAL INFORMATION


Using Geberit washbasin taps with CLAGE E-mini instant water heaters

4.1 Connection example



Installation notes

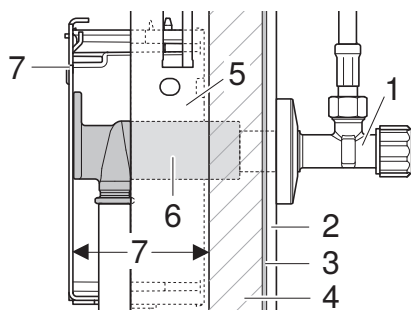- Fasten the elbow tap connector for holding the angle stop valves to the crossbar of the concealed function box.
- Drill fastening holes for mounting the elbow tap connectors in the crossbar of the concealed function box on site.
- When selecting the elbow tap connector, bear in mind that a distance of 7 cm is required between the crossbar and the front edge of the installation element; see graphic below.



- 1 Angle stop valve
- 2 Tiles
- 3 Tile adhesive
- 4 Panelling
- 5 Installation element
- 6 Elbow tap connector
- 7 Crossbar of concealed function box



Contact:

Valid from: 01.04.2026
Valid until: –

TECHNICAL INFORMATION

Using Geberit washbasin taps with CLAGE E-mini instant water heaters

5 Suitable Geberit wall-mounted taps with concealed function box

Washbasin tap	Tap aerator	Run-on time
 Geberit Piave washbasin tap, deck-mounted, mains operation, without mixer Outlet length 17 cm: Art. no. 116.261.xx.1¹⁾ Outlet length 22 cm: Art. no. 116.281.xx.1¹⁾	Geberit tap aerator (accessory): • With MCX3 E-mini instant water heater: 1.9 l/min, art. no. 243.637.00.1 • With MCX7 E-mini instant water heater: 3.8 l/min, art. no. 243.636.00.1	3 seconds
 Geberit Brenta washbasin tap, deck-mounted, mains operation, without mixer Outlet length 17 cm: Art. no. 116.271.xx.1¹⁾ Outlet length 22 cm: Art. no. 116.291.xx.1¹⁾		

1) xx = various colours and surfaces available

Planning rules:

- Only use washbasin taps without mixers.
- Only use the water-saving tap aerators specified in the table.
- Use washbasin taps with mains operation. Washbasin taps with battery operation can also be used, but a mains connection is usually present because of the E-mini instant water heater.
- Set run-on time on 3 seconds:
 - With the Geberit Service Handy: menu item 43 = [3]
 - With Geberit Control app under [settings] / [operation mode] / [normal operation]

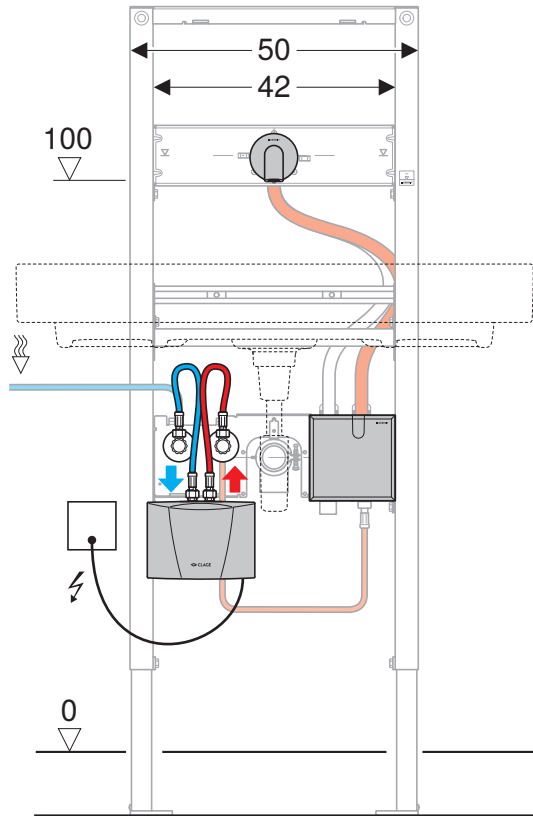
Contact:

Valid from: 01.04.2026
Valid until: –

TECHNICAL INFORMATION


Using Geberit washbasin taps with CLAGE E-mini instant water heaters

5.1 Connection example



Installation notes

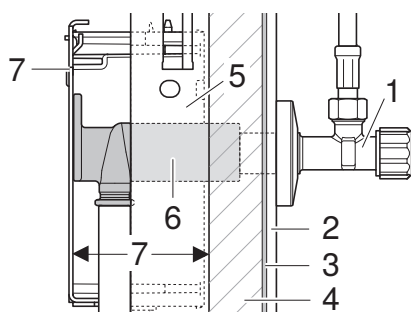- Fasten the elbow tap connector for holding the angle stop valves to the crossbar of the concealed function box.
- Drill fastening holes for mounting the elbow tap connectors in the crossbar of the concealed function box on site.
- When selecting the elbow tap connector, bear in mind that a distance of 7 cm is required between the crossbar and the front edge of the installation element; see graphic below.



- 1 Angle stop valve
- 2 Tiles
- 3 Tile adhesive
- 4 Panelling
- 5 Installation element
- 6 Elbow tap connector
- 7 Crossbar of concealed function box

Contact:

Valid from: 01.04.2026
Valid until: –